

AC/DC

- 1 : -15 to +45
- 2 : -40 to +85
- 3 : 95%
- 4 3000
- 5 3000
- 6 70~106KPa
- 7
- 8

1	Vac	180	220	280	
2	Hz	45	50	65	
3	A			24	
4	A			60	264V
5	PF		0.95		
6	I THD	%			

7		S		5	-25	2
	25		40s	5	AC/DC	EMI
	us					

	1		V _{dc}	55	60	65	RTW1				
	2		V _{dc}	59	59.5	60					
	2		A	0		45					
	3					±2					
	4					±2					
	5					±1					
	6		m V			600					
	7			V _o			±5%	25%	50%	25%	50%
				uS			500	75%	50%		1A/ μ S
	8			V _o			±5%				
	9			mS			500	90%	10%		
10			/			±0.02					
11			uF			3000	500ms/	100	, 500ms.		
48V	1		V _{dc}	46.5	48	49.5					
	2		A	0.1		10					
	3					±2					
	4					±3					
	5					±1					
	6		m V			480					
	7			V _o			± 5%	25%	50%	25%	50%
				uS			500	75%	50%		1A/ μ S
	8			V _o			± 5%				
	9			mS			500 ms	90%	10%		
	10			/			±0.02				
11			uF			3000					




EMC

(CE)	CLASS A	EN55022
(RE)	CLASS A	
	$\pm 6KV$	^a :IEC61000-4-2; $\pm 8KV$ Class B
	$\pm 8KV$	IEC61000-4-2; $\pm 10KV$ Class B
(CS)	IEC61000-4-6 LEVEL3 Class A	
(RS)	IEC61000-4-3 LEVEL3 Class A	
(EFT)	IEC61000-4-4 LEVEL4 Class A	
	IEC61000-4-5 LEVEL4 Class A 2KV, 4KV	
	IEC61000-4-11 70%U 100ms, $0\%U$ 10ms, 0° Class B	

✂

0-00-

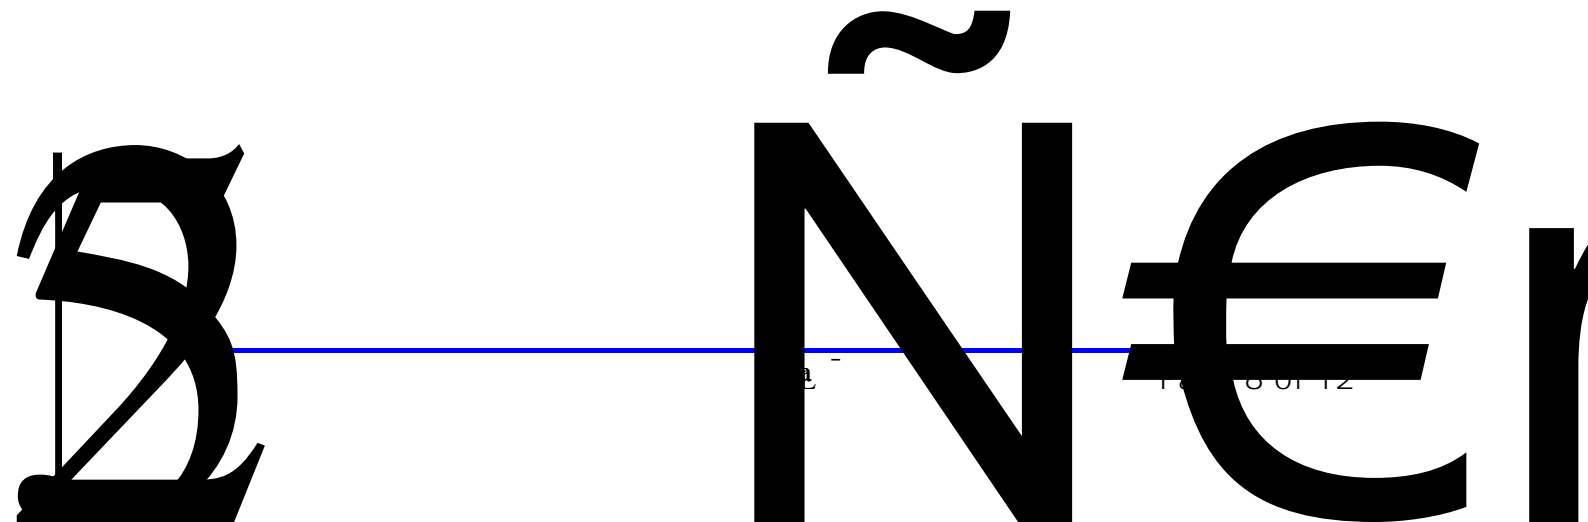



× × 325*130*41mm
()

2.1

	(BHP5-03-11.0-01)	1	L	AC
		2	N	AC
		3	PE	

2.2

	L (AT448080-1)		Vout1-	
			Vout1+	

2.3



